3D PRINTING

N-PLA

Easy to print. Environmentally friendly and non-toxic.

Perfect for rapid prototyping.

The material has a very low shrinkage and therefore, there is no deformation.

PRINTING CHARACTERISTICS

Extrusion temperature 180°C - 230°C

Bed temperature 20°C - 60°C

Enclosure temperature

C - 230°C


Large size

O°C - 60°C

Machining compatibility

Ease of printing

Laser compatibility

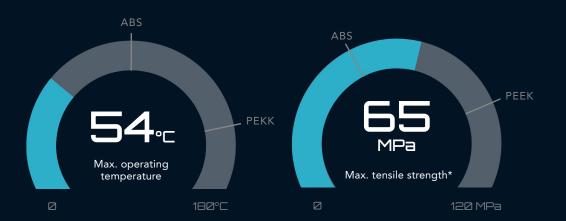



Environmentally friendly



We recommend storing your spools in a dry, dark place, if possible with desiccant. To ensure perfect printing, we recommend steaming your filament at 60°C for 4 hours or more, when the spool has been exposed to the open air for a long period.

Delivered with batch number and material traceability. Coils packed in individual boxes, vacuum-packed with desiccant.

*According to ISO 527.