

3D PRINTING N-ABS


The main advantage of ABS is the simplification of the printing parameters. This material is printed with great ease.

Printing speeds can also be increased with this material.

PRINTING CHARACTERISTICS

Extrusion temperature	240°C - 260°C
Bed temperature	100°C - 110°C
Enclosure temperature	90°C

Ease of printing	● ● ● ● ●
Large size	● ● ● ● ●
Machining compatibility	● ● ● ● ●
Laser compatibility	● ● ● ● ●

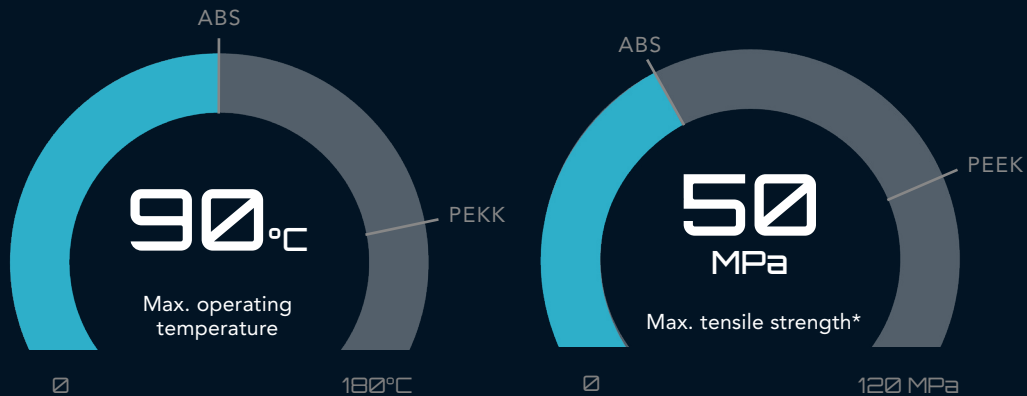

We recommend storing your spools in a dry, dark place, if possible with desiccant. To ensure perfect printing, we recommend steaming your filament at 60°C for 4 hours or more, when the spool has been exposed to the open air for a long period.

Delivered with batch number and material traceability. Coils packed in individual boxes, vacuum-packed with desiccant.

*According to ISO 527.