

3D PRINTING

N-ASA

N-ASA has similar properties to ABS, but has superior resistance to the elements. It can be used to print parts that are exposed to cold, rain or salt water.

Ideal for any part that will be exposed to outdoor conditions such as boat pleasure parts, building components, automotive or outdoor furniture.

PRINTING CHARACTERISTICS

Extrusion temperature	250°C - 270°C
Bed temperature	100°C - 110°C
Enclosure temperature	60°C

Ease of printing





Large size



Machining compatibility



Laser compatibility

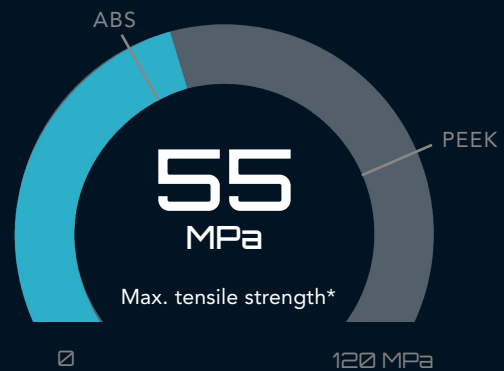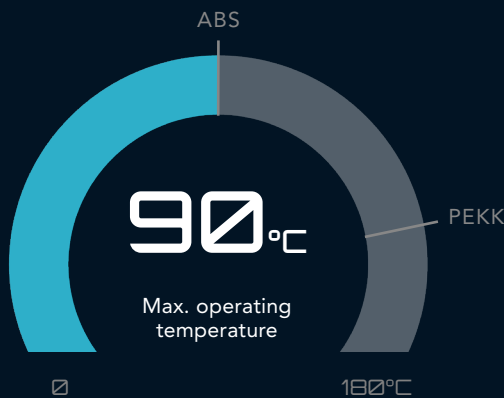

UV resistant



Chemical resistance



We recommend storing your spools in a dry, dark place, if possible with desiccant. To ensure perfect printing, we recommend steaming your filament at 60°C for 4 hours or more, when the spool has been exposed to the open air for a long period.

Delivered with batch number and material traceability. Coils packed in individual boxes, vacuum-packed with desiccant.

*According to ISO 527.