

3D PRINTING N-PLX

PLA of better quality that allows faster printing speeds. Special quality and superior durability.

Tensile strength can be compared to ABS. The material is ecological and non-toxic. Durability of ABS with the ease of printing of PLA.

PRINTING CHARACTERISTICS

Extrusion temperature **195°C - 230°C**

Bed temperature **0°C - 60°C**

Ease of printing




Large size



Machining compatibility



Laser compatibility

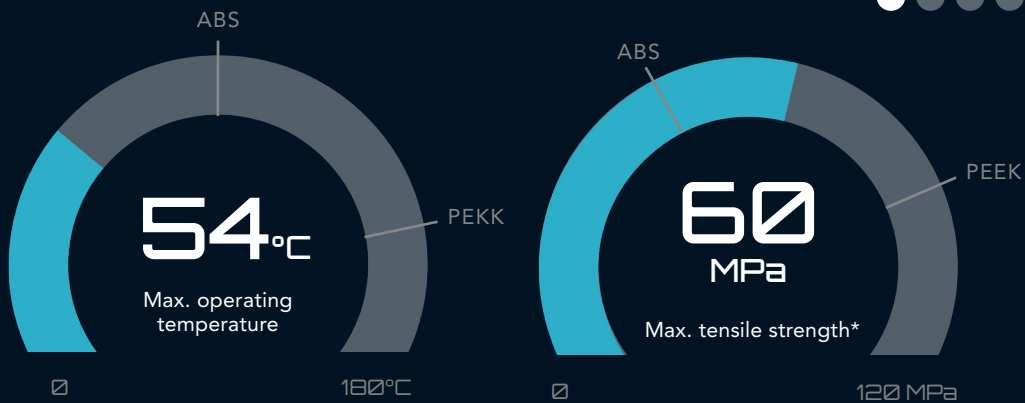

20% + resistant than PLA

 Environmentally friendly



We recommend storing your spools in a dry, dark place, if possible with desiccant. To ensure perfect printing, we recommend steaming your filament at 60°C for 4 hours or more, when the spool has been exposed to the open air for a long period.

Delivered with batch number and material traceability. Coils packed in individual boxes, vacuum-packed with desiccant.

*According to ISO 527.