

3 D PRINTING

N-PETG ESD

N-PETG ESD has great electrical dissipation properties which allows to protect your electrical circuits.

It also has a high resistance to acid, alcohol, oil and hydrocarbon.

PRINTING CHARACTERISTICS

Extrusion temperature **245°C - 255°C**

Bed temperature **85°C - 90°C**

Enclosure temperature **20°C**

Ease of printing





Large size



Machining compatibility



Laser compatibility

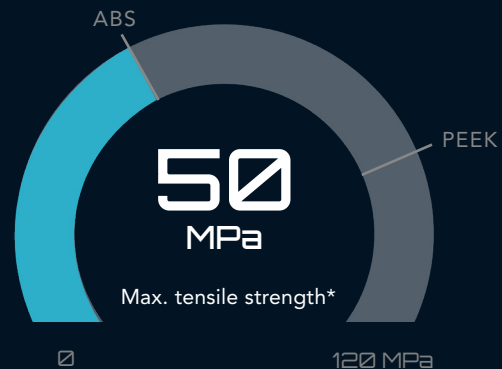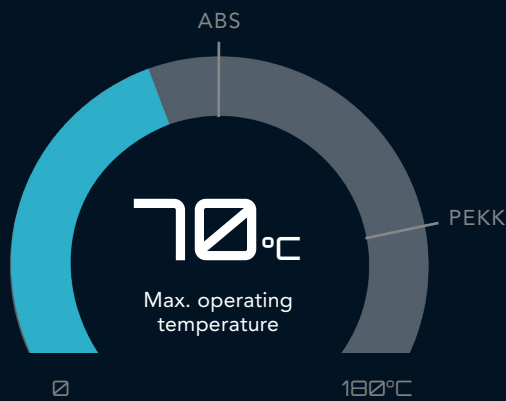

Protects against electrostatic discharge



No toxic fumes



We recommend storing your spools in a dry, dark place, if possible with desiccant. To ensure perfect printing, we recommend steaming your filament at 60°C for 4 hours or more, when the spool has been exposed to the open air for a long period.

Delivered with batch number and material traceability. Coils packed in individual boxes, vacuum-packed with desiccant.

*According to ISO 527.