

3 D PRINTING

N-ABS ESD

Protect your electrostatically sensitive electronic components with N-ABS ESD filament.

This filament is ideal for applications in the electronics industry or in electrical environments.

PRINTING CHARACTERISTICS

Extrusion temperature **240°C - 260°C**

Bed temperature **100°C - 110°C**

Enclosure temperature **90°C**

Ease of printing




Large size





Machining compatibility

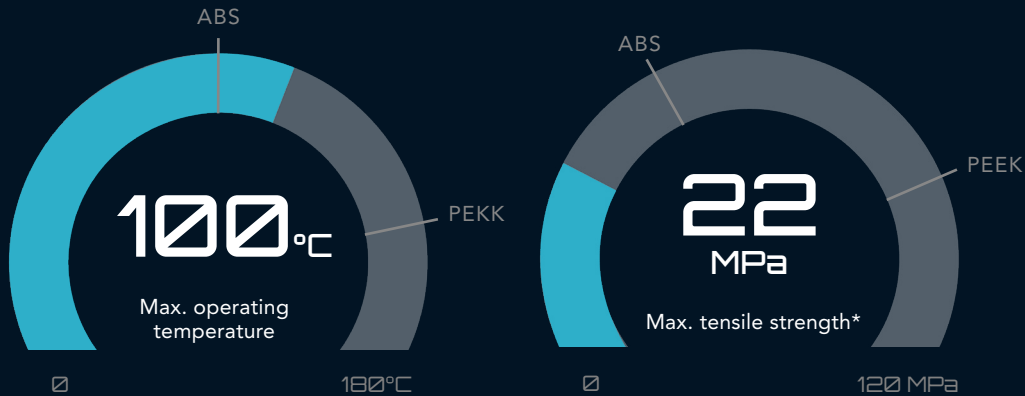

Laser compatibility



 Little shrinkage

 Plateau membership



We recommend storing your spools in a dry, dark place, if possible with desiccant. To ensure perfect printing, we recommend steaming your filament at 60°C for 4 hours or more, when the spool has been exposed to the open air for a long period.

Delivered with batch number and material traceability. Coils packed in individual boxes, vacuum-packed with desiccant.

*According to ISO 527.