

3 D PRINTING

N-PA12 CF

Carbon fiber reinforced PA12 materials meeting the highest requirements of industrial applications.

High temperature resistance, chemical resistance, high abrasion resistance and high impact resistance. Perfect for machine parts.

PRINTING CHARACTERISTICS

Extrusion temperature **255°C - 270°C**

Bed temperature **90°C - 110°C**

Ease of printing





Large size



Machining compatibility



Laser compatibility

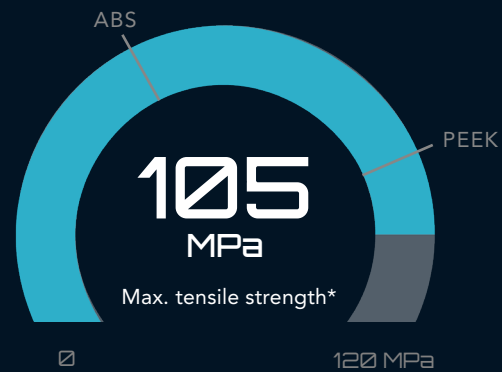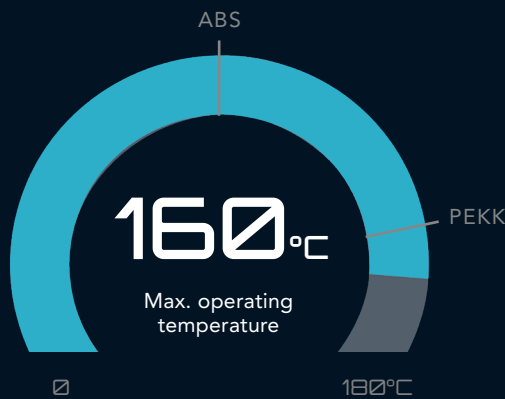

We recommend storing your spools in a dry, dark place, if possible with desiccant. To ensure perfect printing, we recommend steaming your filament at 60°C for 4 hours or more, when the spool has been exposed to the open air for a long period.

Delivered with batch number and material traceability. Coils packed in individual boxes, vacuum-packed with desiccant.

*According to ISO 527.