

3 D P R I N T I N G

N-PC ABS

N-PC-ABS combines the strength of polycarbonate with the printability of ABS.

This filament allows the creation of impact resistant parts. Its non-flammability properties also make it suitable for creating parts for industrial use.

PRINTING CHARACTERISTICS

Extrusion temperature	260°C - 290°C
Bed temperature	100°C - 140°C
Enclosure temperature	100°C

Ease of printing





Large size



Machining compatibility



Laser compatibility

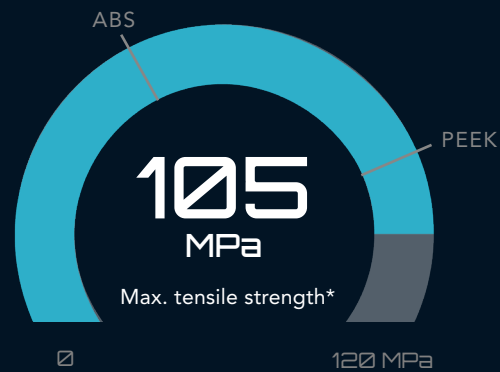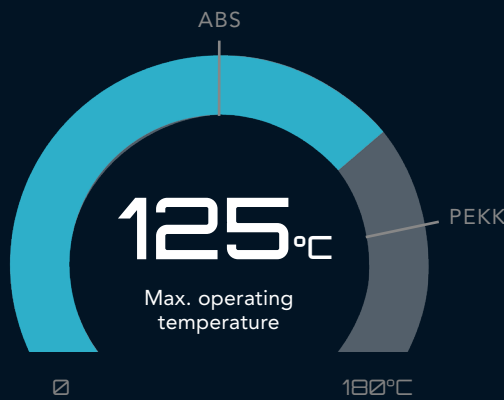

- ⚡ Shock-resistant
- ✓ Ease of printing compared to polycarbonate



We recommend storing your spools in a dry, dark place, if possible with desiccant. To ensure perfect printing, we recommend steaming your filament at 60°C for 4 hours or more, when the spool has been exposed to the open air for a long period.

Delivered with batch number and material traceability. Coils packed in individual boxes, vacuum-packed with desiccant.

*According to ISO 527.