

3 D PRINTING

N-PVA

Water-soluble support material at low printing temperature. Thanks to its property, the printing process is a real pleasure, it is enough to immerse it in warm water, and after a few minutes (depending on the thickness of supports) a clean footprint is released.

The material does not require tray heating.

PRINTING CHARACTERISTICS

Extrusion temperature **180°C - 200°C**

Bed temperature **45°C - 60°C**

Ease of printing




Large size



Machining compatibility



Laser compatibility

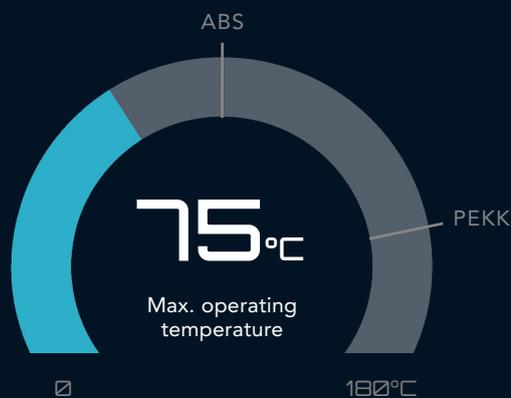

 Water soluble



We recommend storing your spools in a dry, dark place, if possible with desiccant. To ensure perfect printing, we recommend steaming your filament at 60°C for 4 hours or more, when the spool has been exposed to the open air for a long period.

Delivered with batch number and material traceability. Coils packed in individual boxes, vacuum-packed with desiccant.

*According to ISO 527.